



Gola 60

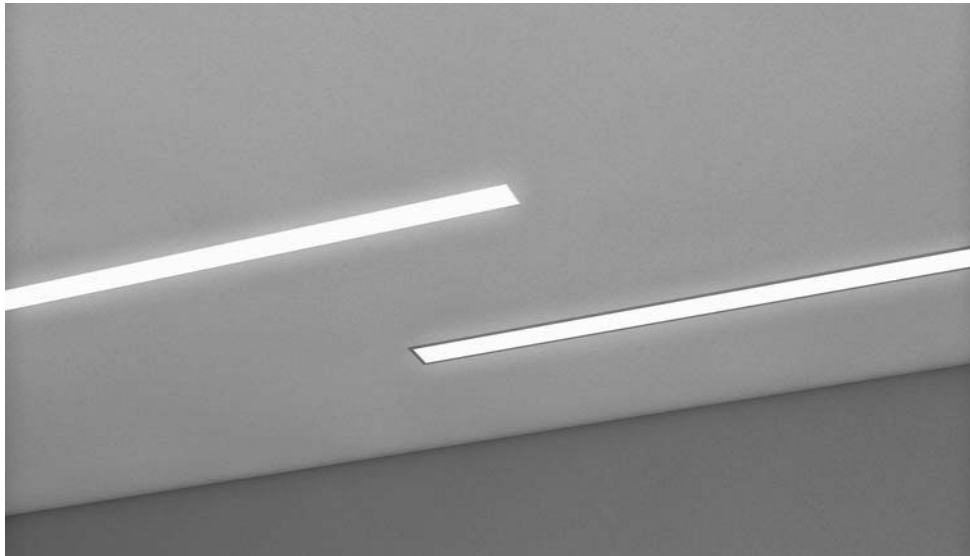

Related products:



GOLA 40 P.28-29
GOLA 95 P.32-35
GOLA 160 P.36-37
GOLA Systems P.246-259

Features

- Recessed Trim or Trimless linear luminaire.
- Housing of extruded aluminium with die-cast end caps mechanically attached with no exposed fasteners.
- Available with extruded ribbed satin white diffuser of UV heat resistant acrylic or with Aluminium reflector/louvers.
- Available in 4 aperture widths (40-60-95-160mm) and in 2 versions, Trim and Trimless, can be mounted vertically or horizontally.
- Easy installation via adjustable brackets.
- System versions can be configured into linear I, 90° L, T and X shapes or other custom configuration (details are all by request).
- Gimbal rotatable and pivotable light heads unit for Low Voltage Halogen, Metal Halide or LED can be incorporated only on Gola 95 or 160 by request.
- Staggered lampping include 2 versions: Gola with aperture 60mm and 95mm staggered 1 lamp, for Gola 95 and 160 staggered 2 lamps.
- Light sources include Linear Fluorescent T5 or Seamless SLS, and LED.
- Long life LED light source provide IR and UV Free emission.
- Tool-free relamping via removable opal diffuser or reflector/louver by snap-in catch action.
- Reflectors are made of super pure aluminium with Miro-Silver coating.
- For Fluorescent lamps, Dimmable and Emergency versions available upon request.
- Designed and manufactured to comply with European standard EN 60598.


Applications

- Gola recessed Trim or Trimless is a linear system for high-quality direct illumination with multiple mounting options to enabling continuous runs of infinite length, Gola offers a turnkey lighting design solutions. Entire projects can be equipped with a single product ensuring consistent aesthetic illumination despite varying ceiling heights and styles.
- Application areas: offices, banks, retails, public areas, departmental stores, schools corridors, hallways, stairwells, boardrooms, cafeterias, restaurants and hotels.

Complete with end caps and accessories for recessed mounting.




Colour

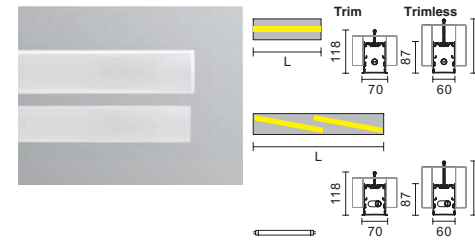

Gola 60 Opal T5		Trim	Trimless			
G060124TOFA	G060124TOMA	1x24W	G5 T5	L:	584	
G060139TOFA	G060139TOMA	1x21/39W	G5 T5	L:	884	
G060154TOFA	G060154TOMA	1x28/54W	G5 T5	L:	1184	
G060180TOFA	G060180TOMA	1x35/49/80W	G5 T5	L:	1484	
G0601139TOFA	G0601139TOMA	1+1x21/39W	G5 T5	L:	1652	
G0601154TOFA	G0601154TOMA	1+1x28/54W	G5 T5	L:	2252	
G0601149TOFA	G0601149TOMA	1+1x35/49W	G5 T5	L:	2852	
G0601180TOFA	G0601180TOMA	1+1x80W	G5 T5	L:	2852	

With integral electronic control gear 220-240V 50/60Hz.

IP40

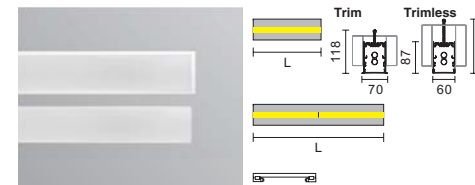


Gola 60 Opal SLS		Trim	Trimless			
G060124SOFA	G060124SOMA	1x14/24W	G5 SLS	L:	584	
G060139SOFA	G060139SOMA	1x21/39W	G5 SLS	L:	884	
G060154SOFA	G060154SOMA	1x28/54W	G5 SLS	L:	1184	

G0601139SOFA	G0601139SOMA	1+1x21/39W	G5 SLS	L:	1768	
G0601154SOFA	G0601154SOMA	1+1x28/54W	G5 SLS	L:	2368	

With integral electronic control gear 220-240V 50/60Hz.

IP40

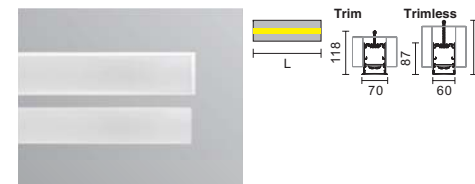


Gola 60 Opal LED		Trim	Trimless			
G060140BOFA	G060140BOMA	-K30 40W	LED 3000K 2400lm	L:	584	
G060140BOFA	G060140BOMA	-K40 40W	LED 4000K 2600lm	L:	584	
G060160BOFA	G060160BOMA	-K30 60W	LED 3000K 3600lm	L:	884	
G060160BOFA	G060160BOMA	-K40 60W	LED 4000K 3900lm	L:	884	
G060180BOFA	G060180BOMA	-K30 80W	LED 3000K 4800lm	L:	1184	
G060180BOFA	G060180BOMA	-K40 80W	LED 4000K 5200lm	L:	1184	
G0601100BOFA	G0601100BOMA	-K30 100W	LED 3000K 6000lm	L:	1484	
G0601100BOFA	G0601100BOMA	-K40 100W	LED 4000K 6500lm	L:	1484	

Passive dissipation, inclusive of integral driver 220-240V 50/60Hz.

CRI>80. Other colour temperature K or CRI are available upon request.

Dali/Leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.


IP40

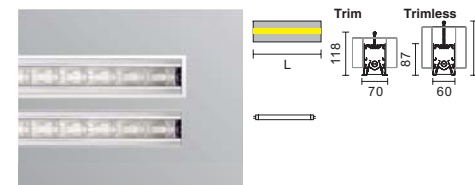

Gola 60 Dark T5		Trim	Trimless			
G060139TDFA	G060139TDMA	1x21/39W	G5 T5	L:	884	
G060154TDFA	G060154TDMA	1x28/54W	G5 T5	L:	1184	
G060180TDFA	G060180TDMA	1x35/49/80W	G5 T5	L:	1484	

With integral electronic control gear 220-240V 50/60Hz.

IP20

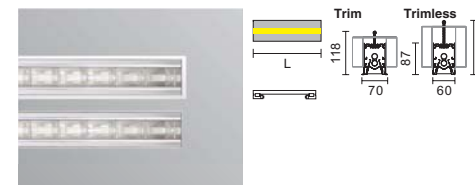

Gola 60 Dark SLS		Trim	Trimless			
G060139SDFA	G060139SDMA	1x21/39W	G5 SLS	L:	884	
G060154SDFA	G060154SDMA	1x28/54W	G5 SLS	L:	1184	

With integral electronic control gear 220-240V 50/60Hz.

IP20



Length of Trim version is (L+14)mm.
 Length of Trimless version is (L+4)mm.